

A  
Major Project  
On  
**MUSIC PREDICTION AND THERAPY USING RANDOM FOREST**

(Submitted in partial fulfillment of the requirements for the award of Degree)

**BACHELOR OF TECHNOLOGY**

In  
**COMPUTER SCIENCE AND ENGINEERING**

By  
Ranjith Nasam(177R1A0541)  
Puli Navya(177R1A0546)  
Rajeshwari Ravikumar(177R1A0547)

Under the Guidance of

**A. KIRAN KUMAR**

(Associate Professor)



**DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING**

**CMR TECHNICAL CAMPUS**

**UGC AUTONOMOUS**

(Accredited by NAAC, NBA, Permanently Affiliated to JNTUH, Approved by AICTE, New Delhi)

Recognized Under Section 2(f) & 12(B) of the UGCAct.1956,

Kandlakoya (V), Medchal Road, Hyderabad-501401.

**2017-21**

# DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING



## CERTIFICATE

This is to certify that the project entitled “**MUSIC THERAPY AND PREDICTION USING RANDOM FOREST**” being submitted by **PULI NAVYA (177R1A0546)**, **RANJITH NASAM (177R1A0541)** & **RAJESHWARI RAVIKUMAR (177R1A0547)** in partial fulfillment of the requirements for the award of the degree of B.Tech in Computer Science and Engineering to the Jawaharlal Nehru Technological University Hyderabad, is a record of bonafide work carried out by him/her under our guidance and supervision during the year 2020-21.

The results embodied in this thesis have not been submitted to any other University or Institute for the award of any degree or diploma.

**Mr. Kiran Kumar**  
Associate Professor  
INTERNAL GUIDE

**Dr. A. Raji Reddy**  
DIRECTOR

**Dr. K. Srujan Raju**  
HoD

**EXTERNAL EXAMINER**

Submitted for viva voice Examination held on \_\_\_\_\_

## ACKNOWLEDGEMENT

Apart from the efforts of us, the success of any project depends largely on the encouragement and guidelines of many others. We take this opportunity to express our gratitude to the people who have been instrumental in the successful completion of this project. We take this opportunity to express my profound gratitude and deep regard to my guide.

**Mr. Kiran Kumar**, Associate Professor for his exemplary guidance, monitoring and constant encouragement throughout the project work. The blessing, help and guidance given by him shall carry us a long way in the journey of life on which we are about to embark. We also take this opportunity to express a deep sense of gratitude to Project Review Committee (PRC) Coordinators: **Mr. J. Narasimha Rao, Mr. B. P. Deepak Kumar, Mr. K. Murali, Dr. Suwarna Gothane and Mr. B. Ramji** for their cordial support, valuable information and guidance, which helped us in completing this task through various stages.

We are also thankful to **Dr. K. Srujan Raju**, Head, Department of Computer Science and Engineering for providing encouragement and support for completing this project successfully.

We are obliged to **Dr. A. Raji Reddy**, Director for being cooperative throughout the course of this project. We would like to express our sincere gratitude to Sri. **Ch. Gopal Reddy**, Chairman for providing excellent infrastructure and a nice atmosphere throughout the course of this project.

The guidance and support received from all the members of **CMR Technical Campus** who contributed to the completion of the project. We are grateful for their constant support and help.

Finally, we would like to take this opportunity to thank our family for their constant encouragement, without which this assignment would not be completed. We sincerely acknowledge and thank all those who gave support directly and indirectly in the completion of this project.

**Ranjith Nasam(177R1A0541)**

**Puli Navya(177R1A0546)**

**Rajeshwari Ravikumar(177R1A0547)**

## **ABSTRACT**

People experience stress due to various factors like work pressure, emotional problems, disaster, violence, etc. in their day-to-day life. This stress leads to many physical and mental health risk such as Asthma, Headaches, Anxiety, heart disease, Depression, Asthma, Alzheimer's disease, etc. Music therapy has the ability to balance both the physical and mental fitness of humans. Music therapy is a healing process that uses music to an inscription the emotional, physical, cognitive needs of a self-one or a group. Here we aimed to establish the music classification and prediction for music therapy using a machine learning algorithm- Random Forest. This study involves factors such as people's age, education status, music interest, preferences of music in both individual and therapist aspects, and their respective relaxation scale before and after music therapy. Our study reveals the important features involved in music prediction for music therapy and the accuracy performance of about 89 is achieved by this classification.

## **LIST OF FIGURES**

<b>FIGURE NO</b>	<b>FIGURE NAME</b>	<b>PAGE NO</b>
Figure 3.1	Project Architecture	6
Figure 3.2	Use case diagram	7
Figure 3.3	Class diagram	8
Figure 3.4	Sequence diagram	9
Figure 3.5	Activity diagram	10

## LIST OF SCREENSHOTS

<b>S.NO</b>	<b>NAME</b>	<b>PAGE NO.</b>
<b>Screenshot 5.1</b>	Music Page result for the emotion Angry	22
<b>Screenshot 5.2</b>	Output on Command prompt for an angry emotion	23
<b>Screenshot 5.3</b>	Output on Command prompt for a happy emotion	24

# TABLE OF CONTENTS

<b>ABSTRACT</b>	<b>i</b>
<b>LIST OF FIGURES</b>	<b>ii</b>
<b>LIST OF SCREENSHOTS</b>	<b>iii</b>
<b>1. INTRODUCTION</b>	<b>1</b>
1.1 PROJECT SCOPE	1
1.2 PROJECT PURPOSE	1
1.3 PROJECT FEATURES	1
<b>2. SYSTEM ANALYSIS</b>	<b>2</b>
2.1 PROBLEM DEFINITION	2
2.2 EXISTING SYSTEM	2
2.2.1 LIMITATIONS OF THE EXISTING SYSTEM	3
2.3 PROPOSED SYSTEM	3
2.3.1 ADVANTAGES OF PROPOSED SYSTEM	3
2.4 FEASIBILITY STUDY	3
2.4.1 ECONOMIC FESIBILITY	4
2.4.2 TECHNICAL FEASIBILITY	4
2.4.3 BEHAVIOURIAL FEASIBILITY	4
2.5 HARDWARE & SOFTWARE REQUIREMENTS	5
2.5.1 HARDWARE REQUIREMENTS	5
2.5.2 SOFTWARE REQUIREMENTS	5
<b>3. ARCHITECTURE</b>	<b>6</b>
3.1 PROJECT ARCHITECTURE	6
3.2 DESCRIPTION	6
3.3 USECASE DIAGRAM	7
3.4 CLASS DIAGRAM	8
3.5 SEQUENCE DIAGRAM	9
3.6 ACTIVITY DIAGRAM	10

<b>4. IMPLEMENTATION</b>	<b>11</b>
4.1 SAMPLE CODE	11
<b>5. SCREENSHOTS</b>	<b>22</b>
<b>6. TESTING</b>	<b>25</b>
6.1 INTRODUCTION TO TESTING	25
6.2 TYPES OF TESTING	25
6.2.1 UNIT TESTING	25
6.2.2 INTEGRATION TESTING	25
6.2.3 FUNCTIONAL TESTING	26
6.3 TEST CASES	26
<b>7. CONCLUSION &amp; FUTURE SCOPE</b>	<b>27</b>
7.1 PROJECT CONCLUSION	27
7.2 FUTURE SCOPE	27
<b>8. REFERENCES</b>	<b>28</b>
8.1 REFERENCES	28
8.2 WEBSITES	28



# **1.INTRODUCTION**

# 1.INTRODUCTION

## 1.1 PROJECT SCOPE

This project is titled as “Music Prediction and Music Therapy for Random Forest”. Therapy is one of the types of treatments that aims to improve one's physical and mental fitness. Listening music is a widespread habit among people which can activate the brain structures combined with the positive mood of an individual. Music therapy is a field that pursues a connection between music and health. Music therapy is also a relaxation technique that helps people to cope up with their stress and stress-related health problems like heart diseases, depression, anxiety headaches, etc. The importance and interest of music therapy among people is well known still what type of music produces what type of effects and how the therapist determine the choice of music for therapy remains unknown.

## 1.2 PROJECT PURPOSE

The main purpose of the project is to know the depression of people, by this project we can understand the emotions of the user. Music plays an important role in reducing the stress levels in a person's life. We have taken music has a factor to cure the chronic illnesses like Alzheimer's disease such as dementia. With the usage of this we can classify the user's depression based on the reason and we can associate with it and suggest the best music for their recovery. Even though we have many other music apps related to relaxation here we predict the mood by their face recognition.

## 1.3 PROJECT FEATURES

The main features of this project are we can predict the stress level of the user by their facial expression. The music is will be played automatically by taking inputs from the user's facial expression. The inputs are taken as a photo of the expression of the user, the output is displayed on the command prompt. The output consists of the emotion of the user such as happy, sad, angry, etc., Based on the output the music is played. Our music page is built upon python code and html code.

On execution the code the music website will start operating. It is easy to use. This can be further developed into a phone application for both android and iOS devices.

# **2.SYSTEM ANALYSIS**

## **2.SYSTEM ANALYSIS**

### **SYSTEM ANALYSIS**

System Analysis is the important phase in the system development process. The System is studied to the minute details and analyzed. The system analyst plays an important role of an interrogator and dwells deep into the working of the present system. In analysis, a detailed study of these operations performed by the system and their relationships within and outside the system is done. A key question considered here is, “what must be done to solve the problem?” The system is viewed as a whole and the inputs to the system are identified. Once analysis is completed the analyst has a firm understanding of what is to be done.

### **2.1 PROBLEM DEFINITION**

Music therapy is used to improve the quality of life of people who suffer from medical disorders like Dementia, Autism, Cancer, Aphasia and heart disease. Various music structures have various therapeutic results. The link between musical styles and cognitive styles has also shown in many studies but the therapeutic aims are not considered. Now the existing system is subjected to close study and problem areas are identified. In this proposed system the music preference type for music therapy is predicted and classified by random forest algorithm using the information of the people such as age, education level, gender, interest on music, self- selected music choice.

### **2.2 EXISTING SYSTEM**

A movie recommendation system based on collaborative filtering approaches. Collaborative filtering takes the data from all the users and based on that generates recommendations. A hybrid system has been presented, this system combines both collaborative and content-based method. An analysis of both the traditional recommendation techniques as been made. As both of these techniques have certain setbacks, another system which is a combination of Bayesian network and collaborative technique was proposed. Before existence the recommendation system, individuals would physically choose movies to watch from movie libraries. They either had to read the user's reviews and based on the review they would select a movie or had to randomly select a movie.

### **2.2.1 LIMITATIONS OF EXISTING SYSTEM**

- Low accuracy in prediction.
- Expensive methods and not everyone can afford.

To avoid all these limitations and make the working more accurately the system needs to be implemented efficiently.

### **2.3 PROPOSED SYSTEM**

Our aim is to reduce the human effort by suggesting movies based on the user's interests. To handle such problems, we introduced a model combining both content-based and collaborative approach. It will give progressively explicit outcomes compared to different systems that are based on content-based approach. Content-based recommendation systems are constrained to people, these systems don't prescribe things out of the box, thus limiting your choice to explore more. Hence, we have focused on a system that resolves these issues.

#### **2.3.1 ADVANTAGES OF THE PROPOSED SYSTEM**

The system is very simple in design and to implement. The system requires very low system resources and the system will work in almost all configurations. It has got following features,

- Efficient on both physical and mental health and gives high accuracy.
- Cost of development, usage and maintenance is less.
- User don't want to select songs manually.
- No need of playlist.
- User don't want to classify the songs based on the emotion.

### **2.4 FEASIBILITY STUDY**

The feasibility of the project is analyzed in this phase and business proposal is put forth with a very general plan for the project and some cost estimates. During system analysis the feasibility study of the proposed system is to be carried out. This is to ensure that the proposed system is not a burden to the company. Three key considerations involved in the feasibility analysis are

- Economic Feasibility

- Technical Feasibility
- Social Feasibility

### **2.4.1 ECONOMIC FEASIBILITY**

The developing system must be justified by cost and benefit. Criteria to ensure that effort is concentrated on project, which will give best, return at the earliest. One of the factors, which affect the development of a new system, is the cost it would require.

The following are some of the important financial questions asked during preliminary investigation:

- The costs conduct a full system investigation.
- The cost of the hardware and software.
- The benefits in the form of reduced costs or fewer costly errors.

Since the system is developed as part of project work, there is no manual cost to spend for the proposed system. Also, all the resources are already available, it gives an indication of the system is economically possible for development.

### **2.4.2 TECHNICAL FEASIBILITY**

This study is carried out to check the technical feasibility, that is, the technical requirements of the system. Any system developed must not have a high demand on the available technical resources. The developed system must have a modest requirement, as only minimal or null changes are required for implementing this system.

### **2.4.3 BEHAVIORAL FEASIBILITY**

This includes the following questions:

- Is there sufficient support for the users?
- Will the proposed system cause harm?

The project would be beneficial because it satisfies the objectives when developed and installed. All behavioral aspects are considered carefully and conclude that the project is behaviorally feasible.

## 2.5 HARDWARE & SOFTWARE REQUIREMENTS

### 2.5.1 HARDWARE REQUIREMENTS

Minimum hardware requirements are very dependent on the particular software being developed by a given Enthought Python / Canopy / VS Code user. Applications that need to store large arrays/objects in memory will require more RAM, whereas applications that need to perform numerous calculations or tasks more quickly will require a faster processor.

- Operating system : windows, Linux
- Processor : intel i3
- Ram : 4 GB
- Hard disk : 250 GB

### 2.5.2 SOFTWARE REQUIREMENTS

The functional requirements or the overall description documents include the product perspective and features, operating system and operating environment, graphics requirements, design constraints and user documentation.

The appropriation of requirements and implementation constraints gives the general overview of the project in regards to what the areas of strength and deficit are and how to tackle them.

- Python IDEL 3.7 version (or)
- Anaconda 3.7 (or)
- Jupiter (or)
- Google Collab

# **3.ARCHITECTURE**



### 3.ARCHITECTURE

#### 3.1 PROJECT ARCHITECTURE

This project architecture shows the procedure followed for music prediction using machine learning, starting from input to final prediction.

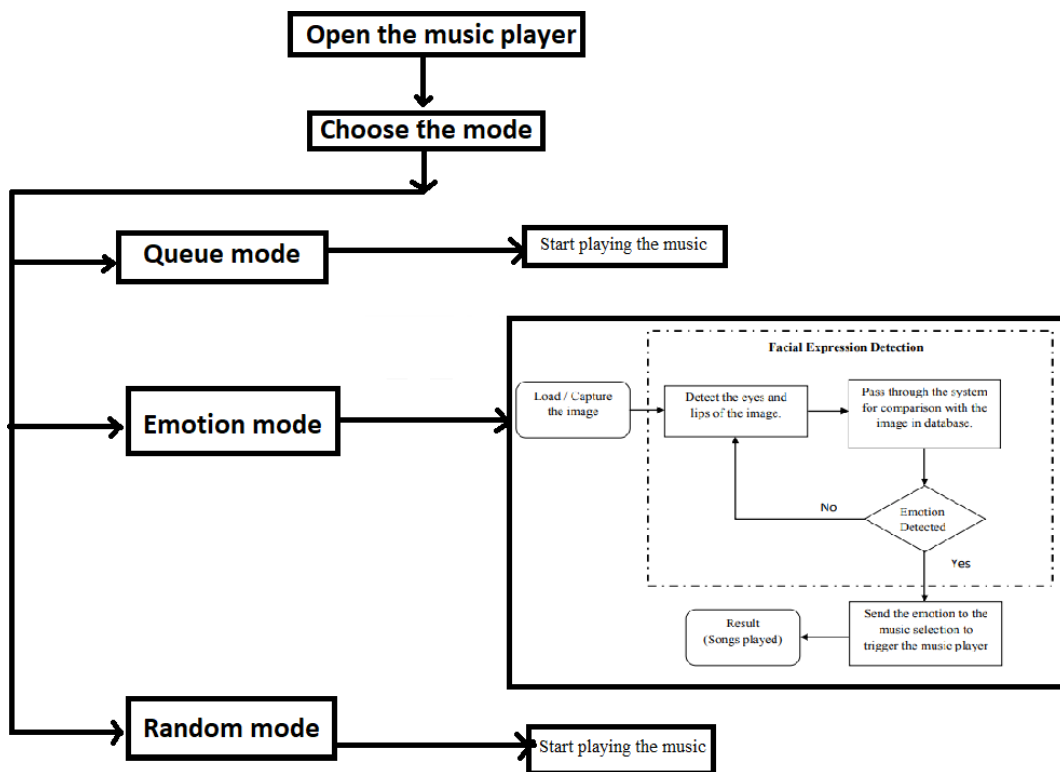



Figure 3.1: Project Architecture of Music prediction for music therapy

#### 3.2 DESCRIPTION

On opening the music player html page, we can see a web page where it as a list of songs and below that we can see three types of modes of playing songs. They are Queue mode, Random mode and Emotional mode. As we are dealing with the emotions of the user it starts with capturing the image of the face through a camera and checks for the database storage match and if it is available then the music will be played according to the emotion of the user which is built in.

### 3.3 USE CASE DIAGRAM

In the use case diagram, we have basically one actor who is the user. The user can start the music software, as access to the resources and to view the details. Based on the user's emotions or choice of music, the music will be played from the music software.

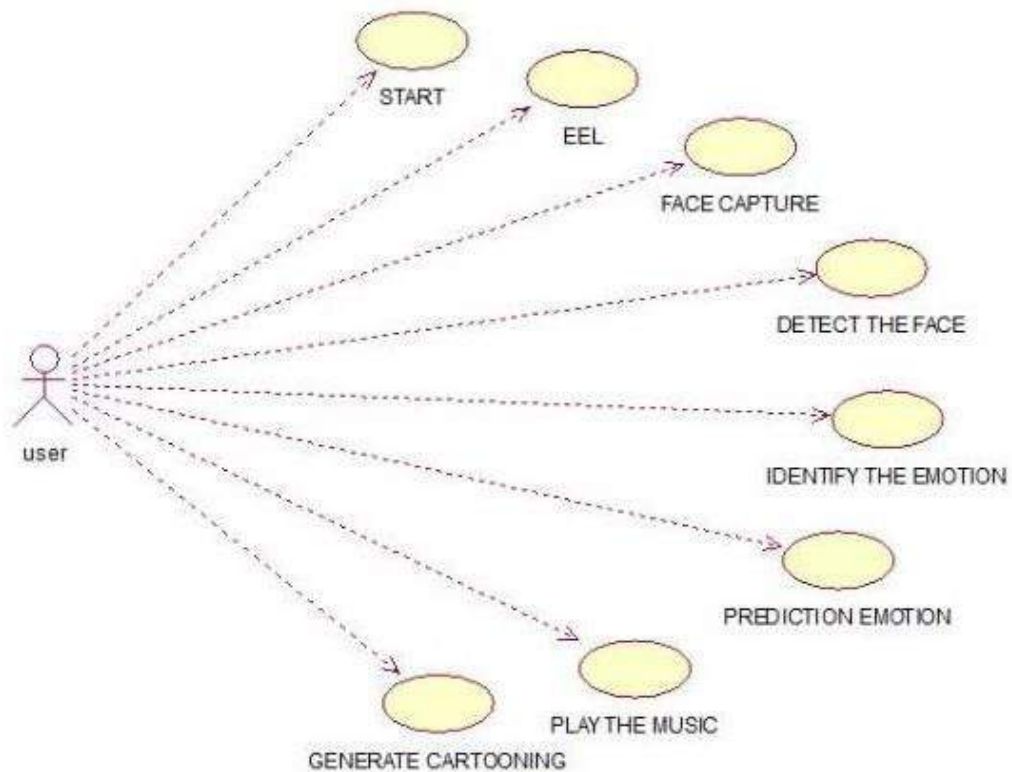

**Figure 3.3:** Use case diagram for Music prediction for Music therapy

### 3.4 CLASS DIAGRAM

Class Diagram is a collection of classes and objects.


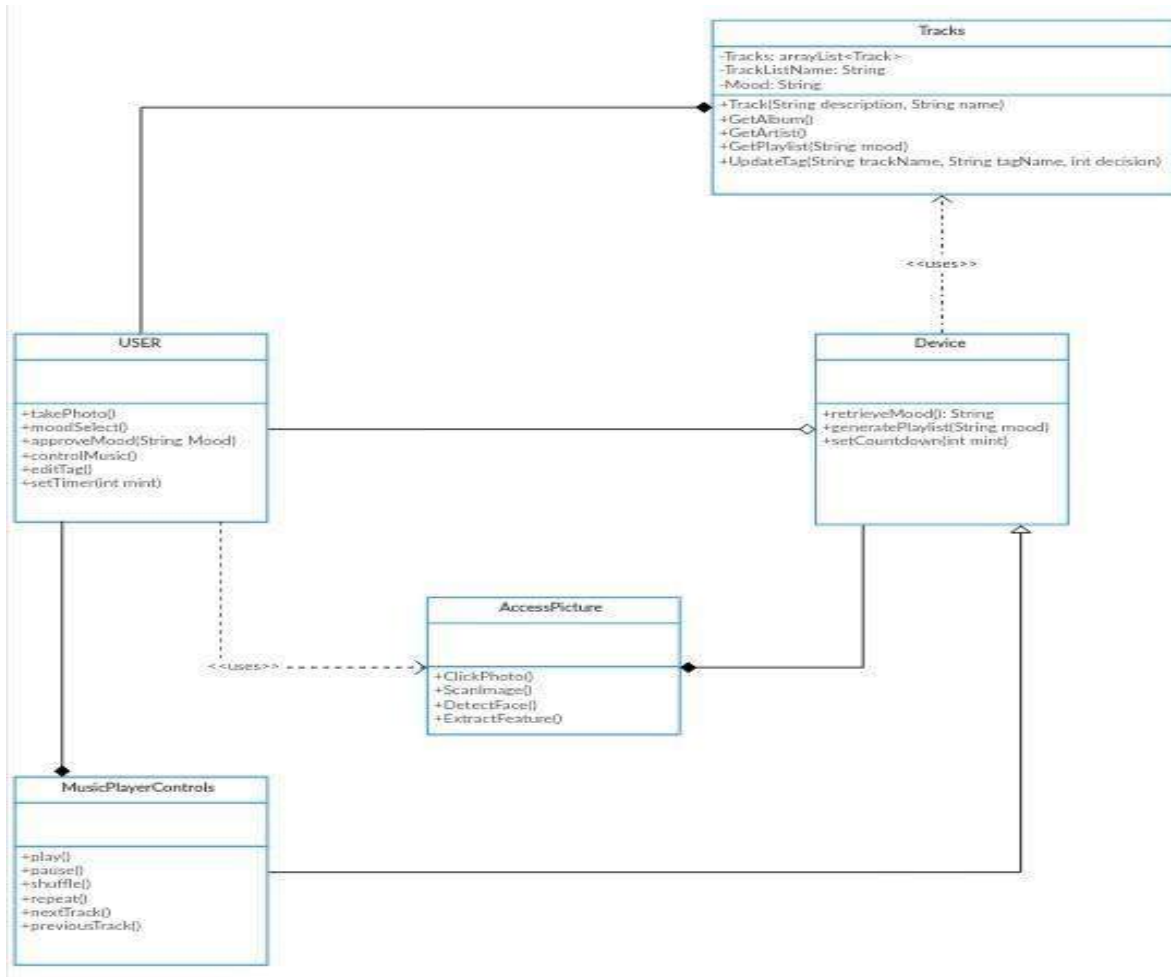


Figure 3.4: Class Diagram for Music prediction for Music therapy

### 3.5 SEQUENCE DIAGRAM


A sequence diagram is a graphical view of a scenario that shows object interaction in a time- based sequence what happens first, what happens next.

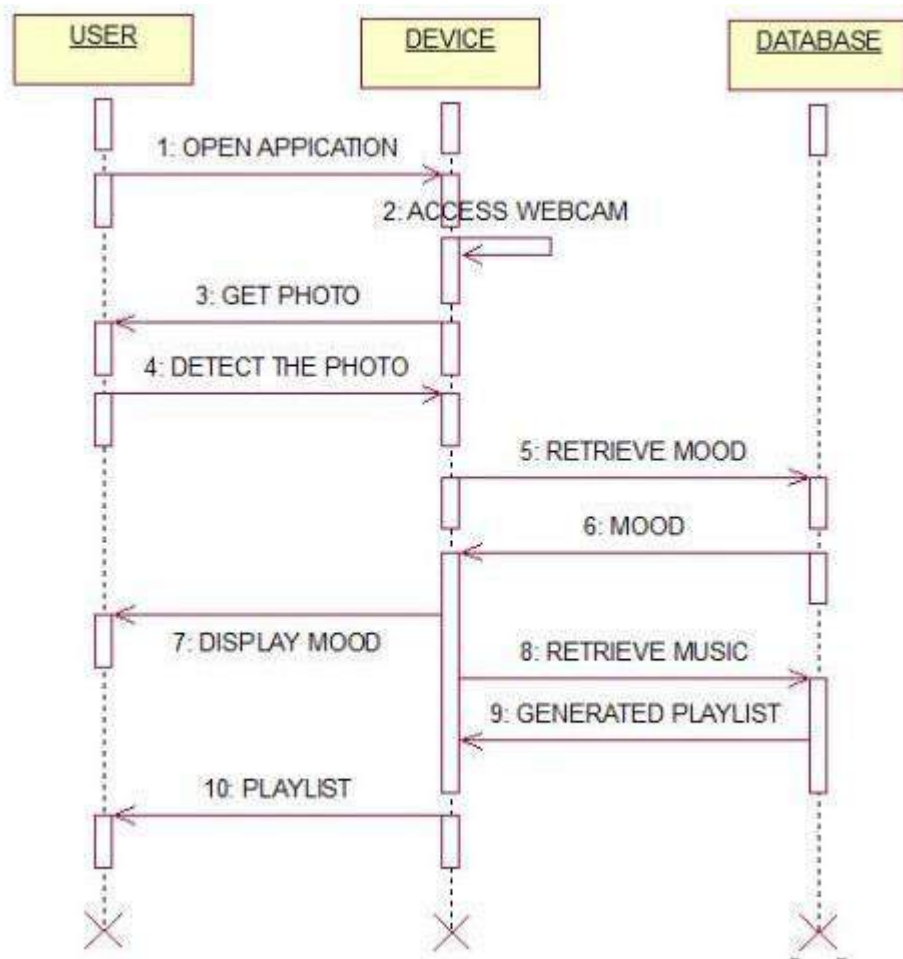

**Figure 3.5:** Sequence diagram for Music Prediction for Music Therapy

### 3.6 ACTIVITY DIAGRAM

It describes about flow of activity states.

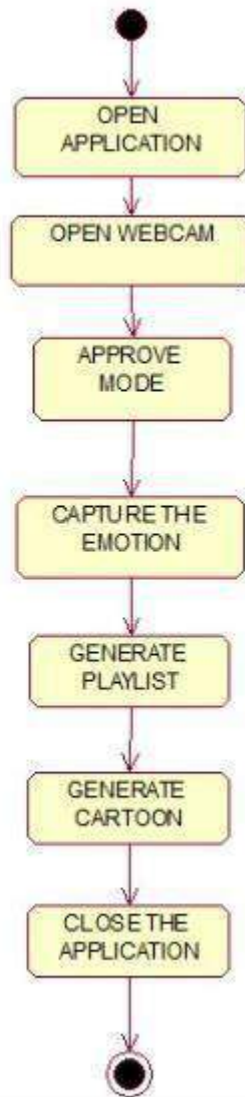

**Figure 3.6:** Activity Diagram for Music Prediction for Music Therapy

# **4.IMPLEMENTATION**

## 4.IMPLEMENTATION

### 4.1 SAMPLE CODE

```
from tkinter import messagebox

from tkinter import *

from tkinter import simpledialog

import tkinter

from tkinter import filedialog

import matplotlib.pyplot as plt

from tkinter.filedialog import askopenfilename

from sklearn.model_selection import train_test_split

from sklearn.metrics import accuracy_score

import numpy as np

import pandas as pd

from genetic_selection import GeneticSelectionCV

from sklearn.metrics import classification_report

from sklearn.metrics import confusion_matrix

from sklearn import svm

from keras.models import Sequential

from keras.layers import Dense

import time
```

```
main = tkinter.Tk()

main.title("Android Malware Detection")

main.geometry("1300x1200")

global filename

global train

global svm_acc, nn_acc, svmga_acc, annga_acc

global X_train, X_test, y_train, y_test

global svmga_classifier

global nnga_classifier

global svm_time,svmga_time,nn_time,nnga_time

def upload():

    global filename

    filename = filedialog.askopenfilename(initialdir="dataset")

    pathlabel.config(text=filename)

    text.delete('1.0', END)

    text.insert(END,filename+" loaded\n");
```



```
def generateModel():  
  
    global X_train, X_test, y_train, y_test  
  
    text.delete('1.0', END)  
  
    train = pd.read_csv(filename)  
  
    rows = train.shape[0] # gives number of row count  
  
    cols = train.shape[1] # gives number of col count  
  
    features = cols - 1  
  
    print(features)  
  
    X = train.values[:, 0:features]  
  
    Y = train.values[:, features]  
  
    print(Y)  
  
    X_train, X_test, y_train, y_test = train_test_split(X, Y, test_size = 0.2, random_state = 0)  
  
  
  
    text.insert(END,"Dataset Length : "+str(len(X))+"\n");  
  
    text.insert(END,"Splitted Training Length : "+str(len(X_train))+"\n");  
  
    text.insert(END,"Splitted Test Length : "+str(len(X_test))+"\n\n");
```

```

def prediction(X_test, cls): #prediction done here

    y_pred = cls.predict(X_test)

    for i in range(len(X_test)):

        print("X=%s, Predicted=%s" % (X_test[i], y_pred[i]))

    return y_pred

# Function to calculate accuracy

def cal_accuracy(y_test, y_pred, details):

    cm = confusion_matrix(y_test, y_pred)

    accuracy = accuracy_score(y_test,y_pred)*100

    text.insert(END,details+"\n\n")

    text.insert(END,"Accuracy : "+str(accuracy)+"\n\n")

    text.insert(END,"Report : "+str(classification_report(y_test, y_pred))+"\n")

    text.insert(END,"Confusion Matrix : "+str(cm)+"\n\n\n\n")

    return accuracy

def runSVM():

    global svm_acc

    global svm_time

    start_time = time.time()

    text.delete('1.0', END)

```

```
cls = svm.SVC(C=2.0,gamma='scale',kernel = 'rbf', random_state = 2)

cls.fit(X_train, y_train)

prediction_data = prediction(X_test, cls)

svm_acc = cal_accuracy(y_test, prediction_data,'SVM Accuracy')

svm_time = (time.time() - start_time)

def runSVMGenetic():

    text.delete('1.0', END)

    global svmga_acc

    global svmga_classifier

    global svmga_time

    estimator = svm.SVC(C=2.0,gamma='scale',kernel = 'rbf', random_state = 2)

    svmga_classifier = GeneticSelectionCV(estimator,

        cv=5,

        verbose=1,

        scoring="accuracy",

        max_features=5,

        n_population=50,

        crossover_proba=0.5,

        mutation_proba=0.2,

        n_generations=40,
```

```
crossover_independent_proba=0.5,  
mutation_independent_proba=0.05,  
tournament_size=3,  
n_gen_no_change=10,  
caching=True,  
n_jobs=-1)  
  
start_time = time.time()  
  
svmga_classifier = svmga_classifier.fit(X_train, y_train)  
  
svmga_time = svm_time/2  
  
prediction_data = prediction(X_test, svmga_classifier)  
  
svmga_acc = cal_accuracy(y_test, prediction_data,'SVM with GA Algorithm Accuracy,  
Classification Report & Confusion Matrix')
```

```
def runNN():  
    global nn_acc  
    global nn_time  
    text.delete('1.0', END)  
    start_time = time.time()  
    model = Sequential()  
    model.add(Dense(4, input_dim=215, activation='relu'))
```

```
model.add(Dense(215, activation='relu'))

model.add(Dense(1, activation='sigmoid'))

model.compile(loss='binary_crossentropy', optimizer='adam', metrics=['accuracy'])

model.fit(X_train, y_train, epochs=50, batch_size=64)

_, ann_acc = model.evaluate(X_test, y_test)

nn_acc = ann_acc*100

text.insert(END, "ANN Accuracy : "+str(nn_acc)+"\n\n")

nn_time = (time.time() - start_time)
```

```
def runNNGenetic():

    global annga_acc

    global nnga_time

    text.delete('1.0', END)

    train = pd.read_csv(filename)

    rows = train.shape[0] # gives number of row count

    cols = train.shape[1] # gives number of col count

    features = cols - 1

    print(features)

    X = train.values[:, 0:100]

    Y = train.values[:, features]

    print(Y)
```

```

X_train1, X_test1, y_train1, y_test1 = train_test_split(X, Y, test_size = 0.2, random_state = 0)

model = Sequential()

model.add(Dense(4, input_dim=100, activation='relu'))

model.add(Dense(100, activation='relu'))

model.add(Dense(1, activation='sigmoid'))

model.compile(loss='binary_crossentropy', optimizer='adam', metrics=['accuracy'])

start_time = time.time()

model.fit(X_train1, y_train1)

nnga_time = (time.time() - start_time)

_, ann_acc = model.evaluate(X_test1, y_test1)

annga_acc = ann_acc*100

text.insert(END,"ANN with Genetic Algorithm Accuracy : "+str(annga_acc)+"\n\n")

```

```

def graph():

    height = [svm_acc, nn_acc, svmgga_acc, annga_acc]

    bars = ('SVM Accuracy','NN Accuracy','SVM Genetic Acc','NN Genetic Acc')

    y_pos = np.arange(len(bars))

    plt.bar(y_pos, height)

    plt.xticks(y_pos, bars)

    plt.show()

```

```
def timeGraph():  
  
    height = [svm_time,svmgga_time,nn_time,nnga_time]  
  
    bars = ('SVM Time','SVM Genetic Time','NN Time','NN Genetic Time')  
  
    y_pos = np.arange(len(bars))  
  
    plt.bar(y_pos, height)  
  
    plt.xticks(y_pos, bars)  
  
    plt.show()  
  
  
font = ('times', 16, 'bold')  
  
title = Label(main, text='Android Malware Detection Using Genetic Algorithm based Optimized  
Feature Selection and Machine Learning')  
  
#title.config(bg='brown', fg='white')  
  
title.config(font=font)  
  
title.config(height=3, width=120)  
  
title.place(x=0,y=5)  
  
  
font1 = ('times', 14, 'bold')  
  
uploadButton = Button(main, text="Upload Android Malware Dataset", command=upload)  
  
uploadButton.place(x=50, y=100)  
  
uploadButton.config(font=font1)
```

```
pathlabel = Label(main)
```

```
pathlabel.config(bg='brown', fg='white')
```

```
pathlabel.config(font=font1)
```

```
pathlabel.place(x=460,y=100)
```

```
generateButton = Button(main, text="Generate Train & Test Model", command=generateModel)
```

```
generateButton.place(x=50,y=150)
```

```
generateButton.config(font=font1)
```

```
svmButton = Button(main, text="Run SVM Algorithm", command=runSVM)
```

```
svmButton.place(x=330,y=150)
```

```
svmButton.config(font=font1)
```

```
svmggaButton = Button(main, text="Run SVM with Genetic Algorithm",  
command=runSVMGenetic)
```

```
svmggaButton.place(x=540,y=150)
```

```
svmggaButton.config(font=font1)
```

```
nnButton = Button(main, text="Run Neural Network Algorithm", command=runNN)
```

```
nnButton.place(x=870,y=150)
```

```
nnButton.config(font=font1)
```



```
nngaButton = Button(main, text="Run Neural Network with Genetic Algorithm",  
command=runNNGenetic)
```

```
nngaButton.place(x=50,y=200)
```

```
nngaButton.config(font=font1)
```

```
graphButton = Button(main, text="Accuracy Graph", command=graph)
```

```
graphButton.place(x=460,y=200)
```

```
graphButton.config(font=font1)
```

```
exitButton = Button(main, text="Execution Time Graph", command=timeGraph)
```

```
exitButton.place(x=650,y=200)
```

```
exitButton.config(font=font1)
```

```
font1 = ('times', 12, 'bold')
```

```
text=Text(main,height=20,width=150)
```

```
scroll=Scrollbar(text)
```

```
text.configure(yscrollcommand=scroll.set)
```

```
text.place(x=10,y=250)
```

```
text.config(font=font1)
```

```
#main.config()
```


```
main.mainloop()
```

# **5.SCREENSHOTS**

## 5. SCREENSHOTS


### 5.1 MUSIC WEBPAGE

After face recognition the emotion is detected to be angry, music is played accordingly.

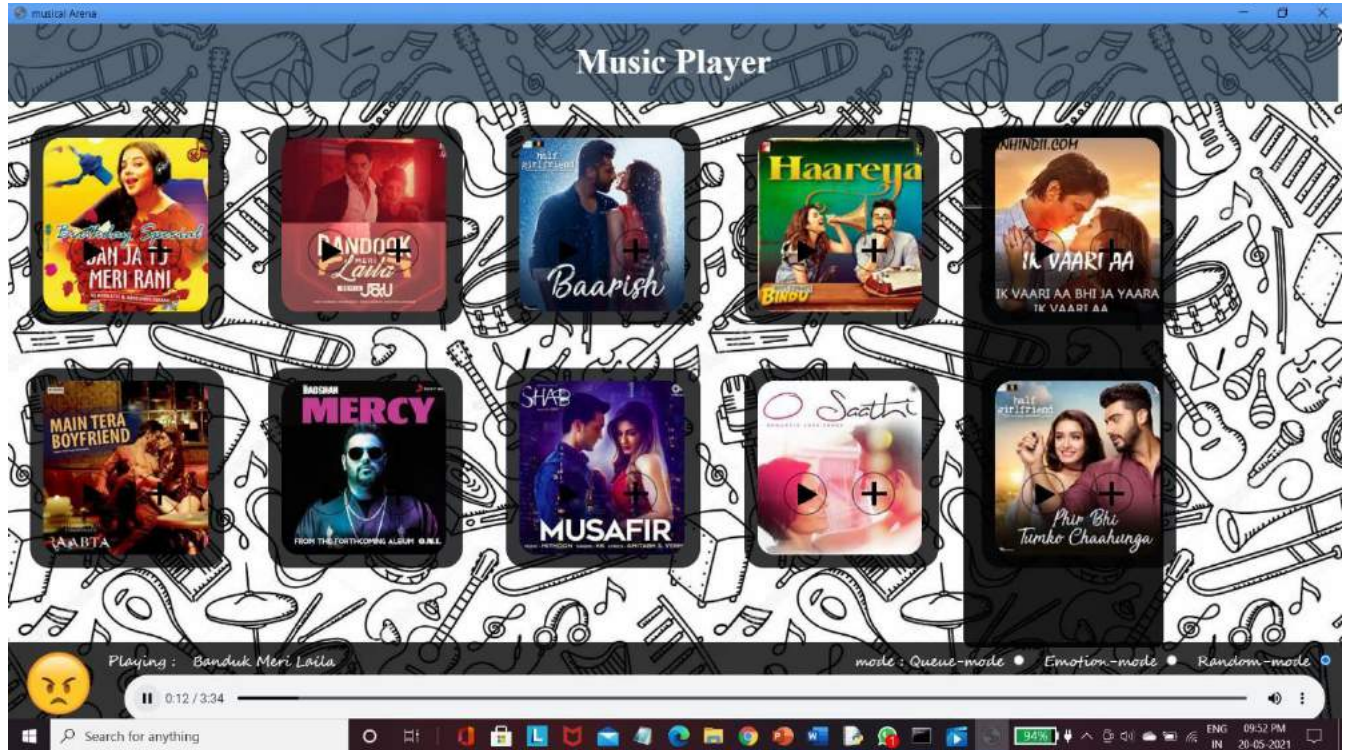

Screenshot 5.1: Music Page result for the emotion Angry

## 5.2 Output on Command prompt for an angry emotion

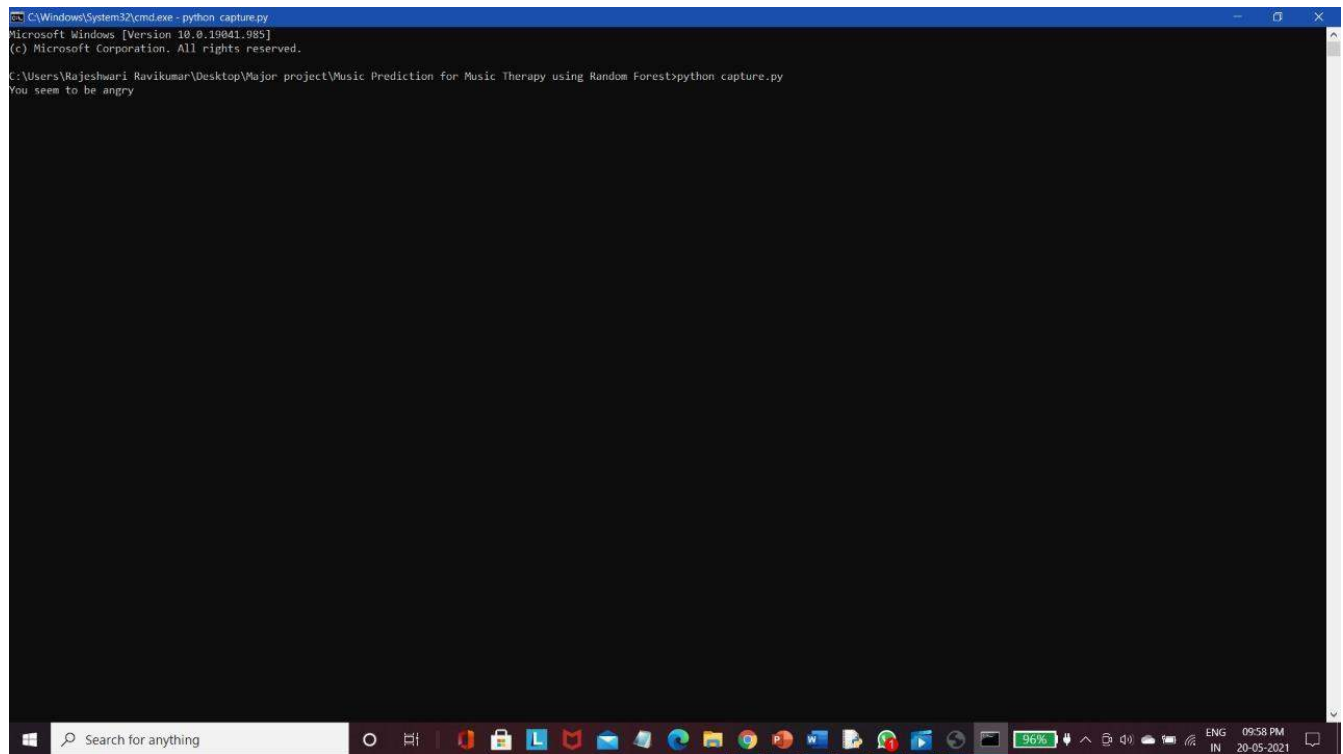


```
C:\Windows\System32\cmd.exe - python capture.py
Microsoft Windows [Version 10.0.19041.985]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Rajeshwari Ravikumar\Desktop\Major project\Music Prediction for Music Therapy using Random Forest>python capture.py
You seem to be angry
```

**Screenshot 5.2:** Output on Command prompt for an angry emotion

### 5.3 Output on Command prompt for a happy emotion

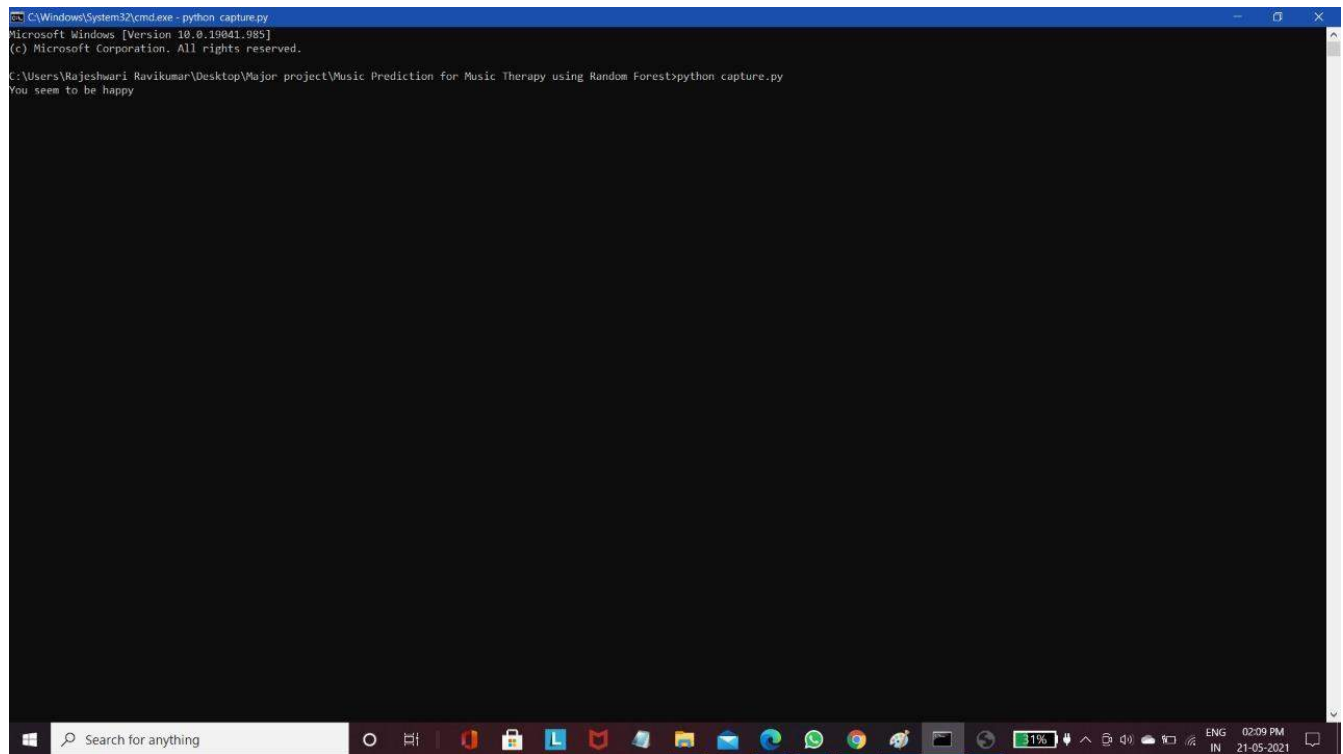

```
C:\Windows\System32\cmd.exe - python capture.py
Microsoft Windows [Version 10.0.19041.985]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Rajeshwari Ravikumar\Desktop\Major project\Music Prediction for Music Therapy using Random Forest>python capture.py
You seem to be happy
```

**Screenshot 5.3:** Output on Command prompt for a happy emotion

# **6. TESTING**

## **6.TESTING**

### **6.1 INTRODUCTION TO TESTING**

The purpose of testing is to discover errors. Testing is the process of trying to discover every conceivable fault or weakness in a work product. It provides a way to check the functionality of components, subassemblies, assemblies and/or a finished product. It is the process of exercising software with the intent of ensuring that the Software system meets its requirements and user expectations and does not fail in an unacceptable manner. There are various types of tests. Each test type addresses a specific testing requirement.

### **6.2 TYPES OF TESTING**

#### **6.2.1 UNIT TESTING**

Unit testing involves the design of test cases that validate that the internal program logic is functioning properly, and that program inputs produce valid outputs. All decision branches and internal code flow should be validated. It is the testing of individual software units of the application .it is done after the completion of an individual unit before integration. This is a structural testing, that relies on knowledge of its construction and is invasive. Unit tests perform basic tests at component level and test a specific business process, application, and/or system configuration. Unit tests ensure that each unique path of a business process performs accurately to the documented specifications and contains clearly defined inputs and expected results.

#### **6.2.2 INTEGRATION TESTING**

Integration tests are designed to test integrated software components to determine if they actually run as one program. Testing is event driven and is more concerned with the basic outcome of screens or fields. Integration tests demonstrate that although the components were individually satisfaction, as shown by successfully unit testing, the combination of components is correct and consistent. Integration testing is specifically aimed at exposing the problems that arise from the combination of components.

### 6.2.3 FUNCTIONAL TESTING

Functional tests provide systematic demonstrations that functions tested are available as specified by the business and technical requirements, system documentation, and user manuals.

Functional testing is centered on the following items:

Valid Input: identified classes of valid input must be accepted.

Invalid Input: identified classes of invalid input must be rejected.

Functions: identified functions must be exercised.

Output: identified classes of application outputs must be exercised.

Systems/Procedures: interfacing systems or procedures must be invoked.

Organization and preparation of functional tests is focused on requirements, key functions, or special test cases. In addition, systematic coverage pertaining to identify Business process flows; data fields, predefined processes.

### 6.3 TESTCASES

Test Case ID	Test Case Name	Test Case Description	Test Steps			Test Case Status	Test Priority
			Step	Expected	Actual		
01	Start the application	Host the application and Test if it starts making sure the required software is available	If it does not start	We cannot run the application	The application hosts success	High	High
02	Home page	Check the deployment Environment for Properly loading the application	If it does not load	We cannot access the application	The application is running successfully	High	High
03	User mode	Verify the working of the application in freestyle mode	If it does not respond	We cannot use the freestyle mode	The application Displays the freestyle page	High	High
04	Data input	Verify if the application takes input and updates	If it fails to take the input or store in the data base	We cannot proceed further	The application updates the input to application	High	High



# **7.CONCLUSION**

## **7.CONCLUSION AND FUTURE SCOPE**

This paper proposed a classification and prediction on music for music therapy. Analysis of the music therapy includes how personal factors and therapist aims determine the music classification. This paper also deals with comparative study on features involvement in system performance by visualizing importance features. The random forest algorithm is more appreciable because it can be applied for both regression and classification. The algorithm has given an appreciable accuracy. This paper also employs the importance of music therapy and its beneficiary effects on both physical and mental health. From this classification music therapist could able to choose music with their therapeutic aims and practice psychological betterment in people.

Further improvement in this research can be carried out by various machine learning techniques for prediction after identifying various factors like age category, gender, education level, current mood status. It can be extended with additional attributes for prediction in need.

# **8.BIBILOGRAPHY**

## **8. BIBILOGRAPHY**

### **8.1 REFERENCE**

[1] Raglio A, Imbriani M, (2019), Machine learning techniques to predict the effectiveness of music therapy: A randomized controlled trial in computer methods programs in biomedicine.

[2] N.N. Vempala, F.A. Russo, Modeling music emotion judgments using machine learning methods, *Front. Psychol.* 8 (2017) 2239, doi: 10.3389/fpsyg.2017.02239.

[3] M. de Witte, A. Spruit, S. van Hooren, X. Moonen, G.J. Stams, Effects of music

### **8.2 WEBSITES**

[1] <http://sersc.org/journals/index.php/IJCA/article/view/16051>

# JOURNAL



# Music Prediction and Therapy using Random Forest

Nasam Ranjith<sup>1</sup>, Puli.Navya<sup>2</sup>, Rajeswari Ravikumar<sup>3</sup>, A. Kiran Kumar<sup>4</sup>

<sup>1,2,3</sup>Student, Department of Computer Science and Engineering, CMR Technical Campus, Medchal, Hyderabad, Telangana, India

<sup>4</sup>Assistant Professor, Department of Computer Science and Engineering, CMR Technical Campus, Medchal, Hyderabad, Telangana, India

\*\*\*\*\*

## ABSTRACT

Everyone wants to listen music of their individual taste, mostly based on their mood. Average person spends more time to listen music. Music has high impact on person brain activity. This model based on real time extraction of facial expression and identify the mood. In this project we are using Haar cascade classifier to extract the facial features based on the extracted features from haar cascade, we are using cohn kanade dataset to identify the emotion of user Facial expression-based music therapy does not need a therapist to do all excessive observations, and the therapy is an adaptive one it can be personalized to each individual patient. There is a choice of different therapies targeting pain management, depression, stroke rehabilitation, stress management, etc. Healthcare providers.

**Keywords:** Image Processing, Face detection, Machine Learning, Open CV, Haar Cascade Classifier.

## INTRODUCTION

Human beings have the natural intelligence to look at someone's face and guess their mood. This intelligence if learnt by an electronic device – laptop, robot automaton or a mobile device – will have valuable application within the real world. Music is considered to be a good medium of emotional communication. Emotional expression is taken into account a vital therapeutic think kind of treatment. In each style and scientific literature, it's connected to psychological wellbeing, whereas inhibition of feeling into account a vital therapeutic think kind of treatment. In each style and scientific literature, it's connected to feeling appears to play task within the development of assorted diseases, as well as physical illnesses.

Using traditional musical therapy, in which the therapist had to analyze the patient's mood manually by using different observing techniques, that doesn't include any computer machine or any other specific intelligent system. After finding out the mood of the patient, the therapist selects songs that would soothe his/her mood and emotional experience. This task was effortful, more time consuming and an individual often faced the dilemma of landing at an appropriate list of songs. Even if they acknowledge the mood of the user then their choice of songs for creating a playlist is of the user then their choice of songs for creating a playlist is such it'll simply decide songs reflective appears to play task within the development of assorted diseases, as well as physical illnesses. Using traditional musical therapy, in which the therapist had to analyze the patient's mood manually by using different observing techniques, that doesn't include any computer machine or any other specific intelligent system. After finding out the mood of the patient, the therapist selects songs that would soothe his/her mood and emotional experience. This task was effortful, more time consuming and an individual often faced the dilemma of landing at an appropriate list of songs. Even if they acknowledge the mood of the user then their choice of songs for creating a playlist is such it'll simply decide songs reflective the present mood of the user and can't attempt to enhance his mood in any way.

So, if the user is gloomy, he are supplied with an inventory of songs with unhappy feeling which might degrade his mood additional and can cause depression. So, the system planned during this paper can notice the feeling of the user from his facial expressions. It'll then give the user with a play list of songs, taking note of that the user can feel higher.

## LITERATURE REVIEW

Olga Sourina and other co-authors proposed Real-time EEG-based emotion recognition for music therapy in which they



used two main algorithms, the first is Information acquisition algorithm and second is Music therapy algorithm [1]. Here authors distinguished between different type of therapy, the first one deals with pain related issues: the music pieces targeting a happy emotion are played to the patient to destruct his/her attention from the pain. The second strategy of therapy deals with depression: here the song targeting the sequence of sad, pleasant and satisfied emotions are played to user. The third type of therapy is used to decrease anxiety level of the patients.

Electroencephalography (EEG) signals are used to detect the human emotions. Fractal dimension (FD) values of EEG could reveal geometric complexity of the signals. It has been proved that FD could be applied in real-time EEG signal processing to identify different brain states.

Ludwika Konieczna–Nowak worked on the correlation between Music Features with Emotional Experiences, also worked on Implications for Music Therapy. Emotions in music may well be elicited in three other ways. First area unit episodic associations, that link sure musical items with specific life circumstances and things coming back from the autobiographies of listeners. Second, painting associations return from the musical likeness to nonmusical phenomena. The ultimate choice, structural expectations, suggests that emotions area unit derived from structural options of the composition. Expressing Emotions in Gestalt Therapy Gestalt psychotherapists focus on emotional experiences [2]. Gestalt therapy techniques are based on existential dialogue that a therapist carries out with a patient.

Ramya Ramanathan and other co-authors proposed an intelligent music player system that is based on human emotional expression and then recommend music to the user. Here they first work on facial recognition techniques, along with learning techniques for correlating the facial expression with an emotion. The learning can be achieved by using ANNs and HMMs [3] for clustering and classification of the emotions, which can be trained datasets of faces such as the Cohn Kanade dataset. After the next phase is music classification, using the Arousal-Valence model of emotion proposed by Thayer. Haar classifier is mostly used for face detection where the classifier is trained with declared face data which enables it to different faces accurately. The music feature extraction can be performed in python by using MIR packages such as LibROSA and PyAudio Analysis. They have used MATLAB for plotting Thayer's Graph using arousal value and Audio Feature Extraction. Music is subject to k means clustering, to obtain clusters of music based on their emotional expression which is reflecting on their face.

Aurobind V. Iyer and other co-authors proposed mood enhancing music recommendation system which is based on Canny Edge Detection and Viola Jones algorithm. In this method there are four major steps are involving Integral Image, Feature Discussion, AdaBoost learning algorithms, Cascading Classifier respectively. The above steps are to be used for detecting image from an image after that it has to recognize emotion carried out by that face. For emotion recognition Eigenface and Fisherfaces are methods used for dimensionality reduction. Eigenface method uses Principal Component Analysis (PCA)[4]. It is a statistical technique that is used for data dimension reduction, data compression and also uses eigenvector properties for determining object orientation. Fisherfaces method uses fisher's Linear Discriminant (FLD) provides higher between- class scatter as compared to PCA.

F. ADAT and other co-authors proposed that Anthropometric model for facial feature points localization and Main axis localization [6]. To realize the anthropometric model following stages:

1. Main axis localization:
  - a) Eye's axis localization using gradient projection
  - b) Mouth axis localization using color information
  - c) Symmetry axis localization using gray image
2. Facial feature points localization using the proportional position.
3. Facial feature points detection using the Shi&Thomasi method for more accuracy.

The confusion matrix of different emotions with Kohn Kanade and FEEDTUM database respectively. This matrix shows the effectiveness of classification method with the SVM.

Kyogu Lee and Minsu Cho proposed a system for

Mood Classification from Musical Audio Using User Group Dependent Model. They used adjectives of USPOP's mood label data and Last. fm's tags as classification keywords. Among those adjectives, they selected 19 terms related to music moods, and found the optimal number of clusters, which was three. They then performed PCA on the mood adjectives using tracks as observations and verified that the top adjectives in each of the three clusters are close to each other [7]. The important part is preprocessing, acoustic feature vectors extracted from the raw audio are high dimensional which likely



causes a problem in estimating the model parameters, known as the curse of dimensionality. In order to reduce the dimension of the feature vectors and maximize the separability between classes, they perform Linear Discriminant Analysis before estimating the model parameters.

Shlok Gilda and other co-authors study the usage of convolutional neural networks (CNNs) in the context of emotion recognition. CNNs are known to simulate the human brain when analyzing visuals; however, given the computational requirements and complexity of a CNN, optimizing a network for efficient computation is necessary [11]. The Emotional module has two different sections: Dataset Description and Model Description. A multilayered CNN is programmed to evaluate the features of images. The layers are Input layer, Convolutional layer, Dense layer, and output layer. The second module is a music classification module which consists of Preprocessing, feature Description of music dataset. The recommendation module is responsible for generating a playlist of relevant songs for the user using mapping techniques which result in playlist generation.

Renuka s. Deshmukh and other co-authors proposed facial emotion detection using a machine learning approach. The machine learning algorithmic program is going to be used for the aim of classification of the emotions. The emotional expression API is going to be further developed which will provide us an output within the kind of emotion that are classified supported the given input to the system. The paper includes only the partial results of implementation; the more implementation is carried on. The performance measures are going to be used counting on the further implementation that's in method [12]. A system for human expression recognition by analyzing key facial regions using PCA and neural networks. Emotion recognition during this paper relies on observation of contours, particularly of facial expressions displayed in still footage. Facial expressions used are obtained by edge detection and specializing in specific facial regions of eyes and the mouth. Therefore, classification and feeling recognition is performed through those two facial regions. The choice of these two regions, as the basis for feeling recognition is intuitive since the most visual indication of emotions is visible in those regions.

### **DESIGN METHODOLOGY**

For implementing this project, the design is divided into three major parts, the first part is extracting facial expressions from an image after performing some important image processing techniques and machine learning approach, the second part is classification of music genre and last part is choosing/playing proper music for therapy which gives the best result for that respective patient. Multiple images are captured from a web camera. To predict the emotion accurately, we might want to have more than one facial image. Blurred images can be an error source (especially in low light conditions) and hence, the multiple images are averaged to get an image devoid of any blur. Histogram equalization is an image processing technique used to enhance the contrast of the image by normalizing the image throughout its range. This image is then cropped and converted to grayscale so that only the foreground of the image remains, thereby reducing any ambiguity.

For music emotion recognition, the music dataset needs to first be obtained. Initially, a small dataset of songs from a local collection is used, after which a subset of the thousands of Song Dataset can be used for further testing and training. The music feature extraction can be performed in Python by using MIR packages such as LibROSA and PyAudio Analysis. These are Python packages that aid the analysis and retrieval of musical features such as tempo, rhythm, timbre, etc. which, along with the lyrics, are further used for clustering by unsupervised learning, using the k-means algorithm. For the efficient execution of this technique, the centroids are manually set to select the locations of the clusters. Once this has been accomplished, each song must be labeled with appropriate descriptors, to make the search process more efficient once the facial emotion recognition has been completed. The music database can then be queried using appropriate descriptors, to obtain the desired music playlist automatically.

### **FACIAL FEATURES EXTRACTION**

A picture is taken throughout the runtime of the appliance, which once preprocessed, is foreseen to belong to one of the emotion categories by the fisherface classifier. The model additionally permits the user to customize the model so as to cut back the variance among the categories any, initially or sporadically, such that solely variance would be that of feeling modification.

#### **Fisherfaces method**

Discriminant Analysis is the best approach to scale back dimensionality especially in classification domain. Linear discriminant analysis is one among the foremost popular Discriminant Analysis. It's a way wont to find a linear combination of features which may be wont to separate classes of various objects. It can thus be used for dimensionality reduction as well as a linear classifier.



Fisherfaces method uses Fisher's Linear Discriminant (FLD) provides higher between-class scatter as compared to PCA. It focuses to maximize the ratio of between-class to within class scatter. As a result of which the tightly spaced clusters are formed.


As the data set that's used for learning labeled, this information is used to create a more reliable model to scale back dimensionality. It starts by creating a picture matrix wherein each column may be a vector that represents pixel intensities of the image.

There are many factors contribute in conveying emotions of a patient. Pose, speech, facial expressions, behavior and actions are a number of them. From these above-mentioned factors, facial expressions have a better importance since they're easily perceptible.

Parts of the Face	Emotion
lip corner pulled, open eyes, open mouth, cheeks raised	Happy
Eyebrow pulled down, open eyes, lip tightened	Anger
Outer eyebrow down, inner eyebrows raised, eyes closed, lip corner down	Sad
Outer eyebrow down, inner eyebrow up, mouth open	Fear
Eyebrow up, open eyes, jaw dropped	Surprise
Lip corner depressor, lower lip depressor, eyebrows down, nose wrinkled	Disgust

**Table 1: Emotion and Facial part**

Above mentioned table is giving brief idea of different facial parts relation with different type of Emotion/Expression carried by Humans.

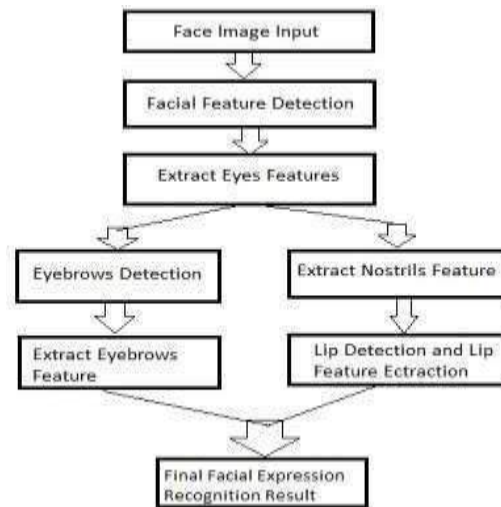


**Fig 1: Facial Emotion Extraction**

The machine learning algorithms are going to be used for the aim of classification of the emotions. The emotion API are going to be further developed which will give us an output within the sort of emotion that are classified supported the given input to the system.

### Music Genre Classification

Categorizing music files consistent with their genre may be a challenging task within the area of music information retrieval (MIR). With the expansion of online music databases and easy access to music content, therapist find it increasing hard to manage the songs that improves patient's health, a method to categorize and organize songs is based on the genre, which is identified by some characteristics of the music like rhythmic structure, harmonic content and instrumentation.

GTZAN which was firstly proposed by G. Tzanetakis in is one among the foremost popular dataset used for music signal processing. It contains 1,000 music with 30-second, 22050 Hz frequency and 16 bits. Genres within the GTZAN are blues, classical, country, disco, hip-hop, jazz, metal, pop, reggae and rock and every one of those genres have 100 music. In this section, to classify music consistent with their genre some machine learning algorithms are discussed. The classification algorithms utilized in this part are Naive Bayes, Random Forest, K Nearest Neighbors, Decision Tree and Support Vector Machine.

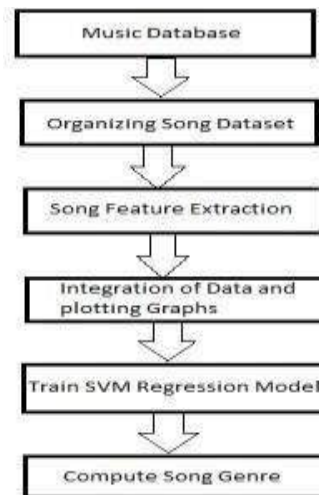

**Fig 2: Music Genre Classification**

### Support Vector Machine (SVM):

In machine learning, support-vector machines are supervised learning models with associated learning algorithms that analyze data used for classification and regression analysis. Given a set of training examples, each marked as belonging to at least one or the opposite of two categories, an SVM training algorithm builds a model that assigns new examples to one category or the opposite, making it a non-probabilistic binary linear classifier (although methods like Platt scaling exist to use SVM during a probabilistic classification setting). An SVM model may be a representation of the examples as points in space, mapped in order that the samples of the separate categories are divided by a transparent gap that is as wide as possible. New examples are then mapped into that very same space and predicted to belong to a category supported the side of the gap on which they fall. The intelligent system is created keeping in mind the simplicity of use by the therapist and to enable them the power of machine learning for their day-to-day work.

### Applications-

1. Classification of images can also be performed using SVMs
2. Hand-written characters can be recognized using SVM
3. The SVM algorithm has been widely applied in the biological and other science field.
4. SVMs are helpful in text and hypertext categorization.

A number of emotions is collected and put up in the list. Each emotion category has a number of songs listed in it. When the user's expression is classified with the help of SVM algorithm, songs belonging to that category.

### Recommendation Therapy Module

This module is responsible for generating a playlist of relevant songs for the patient. It allows the user to modify the playlist based on therapist preferences and modify the class labels of the songs as well. Classified songs are mapped to the user's mood. After the mapping procedure is complete, a playlist of relevant songs is generated. Similar songs are grouped together while generating the playlist. Similarity between songs was calculated by comparing songs over 50 ms intervals, centered on each 10 ms time window. After empirical observations, we found that the duration of those intervals is on the order of magnitude of a typical song note. Feature values like an audio file were compared to the values (for an equivalent features) corresponding to audio files belonging to an equivalent class label. The recommendation engine features a twofold mechanism. It recommends songs based on: Patient's perceived mood and Therapist's preference also.

### RESULT OF IMPLEMENTATION

The implementation is carried out in Python3.6 or above. Here, for the facial expression recognition purpose testing was carried out on dynamic images to achieve real time performance. The images were taken through the in-built camera for various individuals. The detected faces are then accustomed to train the face, which works on reduction of variance between classes. Fisher face recognition method proves to be efficient because it works better with additional features. Here noise and blurriness are off from the image Fig 4: Real-time Detection of Mouth following which the image is converted from RGB to Grayscale then resized into 300\*300 pixels. The results of proposed application are shown here.

### Recognizing Different Facial Features

The primary objective is to detect face from a captured image then detecting different facial features to extract patient's emotion in real time environment.

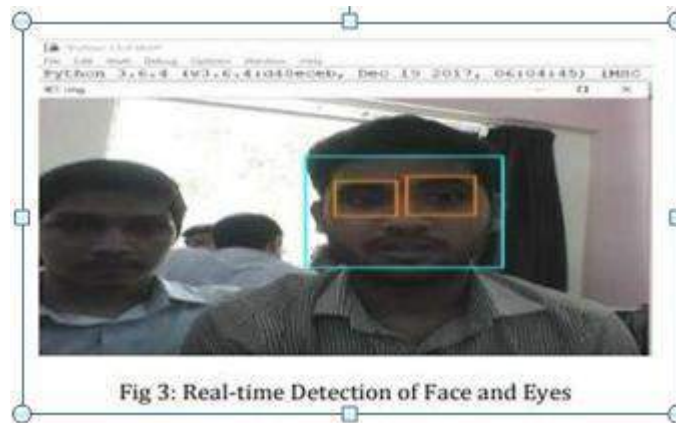



Fig 3: Real-time Detection of Face and Eyes



Fig 4: Real-time Detection of Face and Eyes

### Facial Expression Extraction

Different type of expression of patients can be extracted like Happy, Sad, Neutral, Disgust, Anger, Fear, and Surprise.

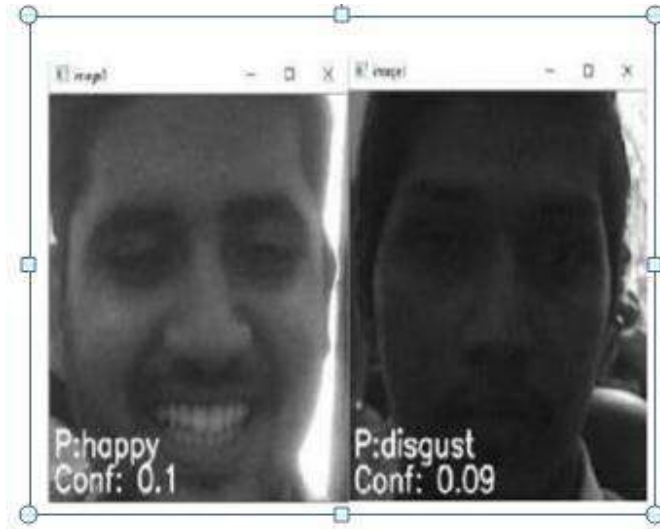

**Fig 5: Happy and Disgust Emotions**

### The GUI for Music Therapy



**Fig 6: Graphical User Interface**

### CONCLUSION

The intelligent system is created keeping in mind the simplicity of use by the therapist and to enable them the power of machine learning for their day-to-day work. This musical treatment system was made keeping in mind the ease of use and intuitive interface of the music player for listening music of the required mood. Once the user opens the application and runs the program, the program automatically detects the emotions of the person in front of camera and plays the music accordingly. The online music player is built by using HTML, CSS and java script, making it very robust and sturdy. The main highlight of the music therapy application is it automatically plays music and has an option for further improving the trained model by choosing the training of model again.

### REFERENCES

- [1] Olga Sourina ,Yisi Liu, Minh Khoa Nguyen “Real-Time EEG-Based Emotion Recognition For Music Therapy” Published by journal on Multimodal User Interfaces – Springer International Publishing on 2012 5:27-35.
- [2] Anna Bukowska, Krzysztof Stachyra, Amelia Oldfield “Musical Therapy and Emotional Expression: A kaleidoscope of Perspective” Edited by LudwikaKonicieczna–Nowak Published by Katowise ISBN: 978-83942090-3-2 on 2016.



- [3] RamyaRamanathan, RadhaKumaran, Ram rohan, Rajat Gupta, VishalakshiPrabhu “An Intelligent Music Player Base on Emotion Recognition” Published by IEEE International Conference on Computational Systems and Information Technology for Sustainable Solutions 2017 Pageno 299-303.
- [4] Aurobind V. Iyer, Viral Pasad, Karan Prajapati “Emotion Based Mood Enhancing Music Recommendation” Published by IEEE International conference on RTEICT, May 2017, India. Page No: 1573-1577.
- [5] Pratik Gala, Raj Shah, Vinee Shah, Yash Shah, Mrs. Sarika Rane “Moody Player: A Music Player Based on Facial Expression Recognition” Published by IRJET Volume: 05 Issue: 04 on April-2018 ISSN: 2395-0056.
- [6] F. ADAT,C. MAAOUI and A. PRUSKI “Human
- [7] –Computer Interaction Using Emotion Recognition from Facial Expression” Published by IEEE UKSim 5<sup>th</sup> European Symposium on Computer Modeling and Simulation on 2011.
- [9] Kyogu Lee and Minsu Cho “Mood Classification from Musical Audio Using User Group-Deendent Model” Published by IEEE 10<sup>th</sup> International Conference on Machine Learningand Application on 2011 (978-07695-4607- 0/11).
- [10] JungHyun Kim, Seungjae Lee, WonYoungYoo“Implementation And Analysis Of Mood-Based Music Recommendation System” Published by ICACT on 2013 ISBN978-89-968650-1-8.
- [11] Sushmita G. kamble and Asso. Prof. A.H. Kulkarni “Facial Expression Based Music Player” Published by IEEE International Conference on Advance Computing, ICACCI on Sep, 2016.
- [12] Karthik Subramanian Nathan, ManasiArun and Megala S kannan “EMOSIC-An Emotion Based Music Player for Android” Published by IEEE, ISSPIT on 2017.
- [13] Shlok Gilda, Hussain Zafar, ChintanSoni and KshitijaWaghrdekar “Smart Music Player Integration Facial
- [14] Emotion Recognition and Music Mood Recommendation” Published by IEEE WISPNET on 2017.
- [15] Renuka S. Deshmukh, VandanaJagtap and ShilpaPaygude “Facial Emotion Recognition
- [16] system Through Machine Learning” Published by ICICCS on 2017.
- [17] SwathiSwaminathanand E. Glenn Schellenberg“Current
- [18] Emotion Research in Music Psychology” Published Emotion Review Vol. 7, No.2 on April 2015 (189-197), ISSN 1754-0739.
- [19] Maruthi Raja S K, Kumaran V, KeerthiVasanAandKavitha N “Real TimeIntelligent Emotional Music Player Using Android” Published by Journal for Research Volume 03, Issue 01 on March 2017.
- [20] Prof. Vijaykumar R. Ghule, Abhijeet B. Benke , ShubhamS. jadhav and SwapnilA. Joshi “Emotion Based Music Player Using Facial Recognition” Published by IJIRCCF Volume05, Issue 02 on Feb 2017